

Liquid Phase Carbon Media


GAC-L Filter – 250-2000 lb. (113-907 kg) Vessels

The GAC-L filter is a media filter vessel designed to treat liquid streams. While the typical design application is activated carbon adsorbent unit, the filter can easily accommodate many media types.

APPLICATIONS

- Dissolved Organic Removal (Activated Carbon)
- Suspended Solids Removal (Sand Filter)
- Dissolved Minerals (Softener Resin)
- Oil and Grease Removal (Organo-Clays)
- Dissolved and Precipitated Metals Removal
- Special Organics (Resin/Carbon Blend)
- Catalytic Reactor (Chlorine and Peroxide Removal)
- Bio-Remediation Contactor Unit
- Call Geotech for larger systems

PRESSURE DROP VS. RATE

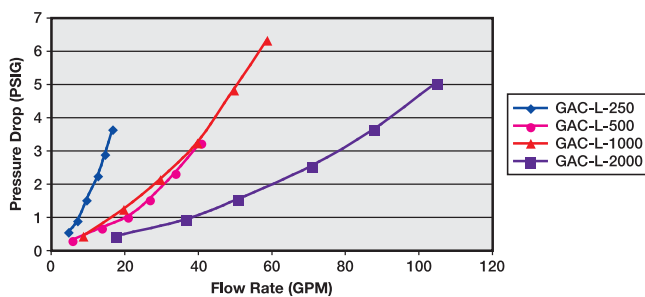

SPECIFICATIONS

Model	GAC-L-250	GAC-L-500	GAC-L-1000	GAC-L-2000
Overall Height	4'1" (1.2m)	5'2" (1.6m)	6'2" (1.9m)	7'4" (2.2m)
Diameter	24" (61cm)	30" (76cm)	36" (91cm)	48" (122cm)
Inlet/Outlet (FNPT)	2" (5cm)	2" (5cm)	2" (5cm)	3" (7.6cm)
Drain/Vent (FNPT)	OPT ¼" (6.3mm)	OPT ¼" (6.3mm)	OPT ¼" (6.3mm)	OPT ¼" (6.3mm)
GAC Fill	250 lbs. (113 kg)	500 lbs. (227 kg)	1000 lbs. (454 kg)	2000 lbs. (907 kg)
Shipping/Operational Weight	415/850 lbs. (188/385.5 kg)	875/1,765 lbs. (397/800 kg)	1,500/3,100 lbs. (680/1406 kg)	2,925/6,400 lbs. (1327/2903 kg)
Vessel/Internal Piping	CS (SA-36)/SCH 40 PVC	CS (SA-36)/SCH 40 PVC	CS (SA-36)/SCH 40 PVC	CS (SA-36)/SCH 40 PVC
Internal Coating	Polyamide Epoxy Resin	Polyamide Epoxy Resin	Polyamide Epoxy Resin	Polyamide Epoxy Resin
External Coating	Epoxy Mastic	Epoxy Mastic	Epoxy Mastic	Epoxy Mastic
Maximum Pressure/Temperature	60 PSIG/140°F (4 bar/60°C)	40 PSIG/140°F (2.7 bar/60°C)	40 PSIG/140°F (2.7 bar/60°C)	40 PSIG/140°F (2.7 bar/60°C)
Cross Sectional Bed Area	3.1 ft. ² (.3 m ²)	4.9 ft. ² (.5 m ²)	7 ft. ² (.6 m ²)	12.5 ft. ² (1.2 m ²)
Bed Depth/Volume	2.8 ft./8.7 ft. ³ (.8 m ³)	3.4 ft./16.7 ft. ³ (1 m ³)	5 ft./33 ft. ³ (1.5 m ³)	5.5 ft./68.7 ft. ³ (1.7 m ³)

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com