

Environmental Submersible Pumps

Grundfos 475S Teflon® Retrofitted Submersible Pumps

These Grundfos submersible pumps are made of stainless steel and retrofitted with Teflon® to handle the rigors of contaminated groundwater pumping and continuous operation in remediation applications. Built to deliver optimum efficiency during periods of high demand, all Grundfos pumps provide low, long-term operating costs and high operating reliability regardless of the application.

Grundfos Teflon® retrofitted submersibles meet government guidelines for environmental equipment and have been proven through extensive use in the field.


FEATURES

- **Made For 8" (20 cm) and Larger Wells**
Flow rates of 95 to 680 GPM (359.6 to 2,574.1 LPM).
- **State-of-the-art Hydraulics**
Pump efficiency is maximized by constant improvement of the high-performance hydraulic design, and precise manufacturing process.
- **Manufactured With High-grade Stainless Steel**
Rugged stainless steel construction inside and out resists corrosion and attack from aggressive liquids.
- **Wear-resistant Design**
Designed to flush abrasive particles from the pump, and made from stainless steel to resist wear caused by abrasives.
- **Built-in Check Valve**
Prevents back-flow into the well once the pump is shut down.
- **User Friendly Cable Guard For Easy Installation**
- **7½ to 125 HP Motors**
Stainless steel construction and quality design.
- **Motor Controls and Protection**
Available controls to protect the motor against burnout and dry-running, plus the ability to monitor the system allowing the user to optimize settings.

OPERATION

Typical clean-up operations include water table depression techniques to isolate and remove dissolved contaminants.

With correct placement of the recovery well and proper sizing of the depression pump, the water table is depressed to stop and reverse the movement of the contamination plume. Once isolated, the contaminant is removed for treatment, re-use, or proper disposal.

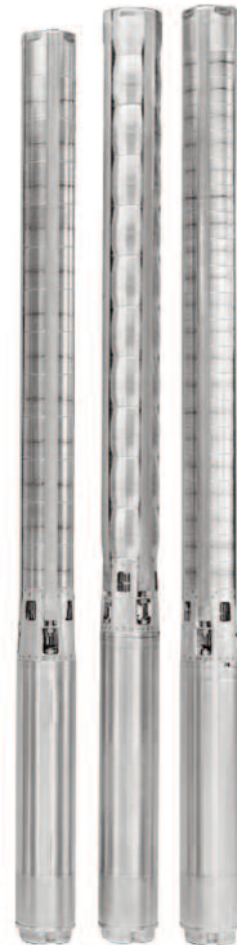

GRUNDFOS 

*Geotech is a Certified
Grundfos Master Distributor*

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205


(303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com

DIMENSIONS & WEIGHTS

Model No.	HP	Motor Size		Discharge Size	Dimensions												Approximate Shipping Wt.	
		In.	CM		A		B		C		D		E		F		Lbs.	Kg
475S75-1A	7½	6	15	6" NPT	48.5	123.2	24.2	61.5	24.3	61.7	5.4	13.7	7	17.8	54.6	138.7	161	73.0
475S100-1	10	6	15	6" NPT	49.7	126.2	25.4	64.5	24.3	61.7	5.4	13.7	7	17.8	55.8	141.7	171	77.6
475S150-2B	15	6	15	6" NPT	57.4	145.8	28	71.1	29.4	74.7	5.4	13.7	7	17.8	63.5	161.3	195	88.5
475S200-2	20	6	15	6" NPT	60	152.4	30.6	77.7	29.4	74.7	5.4	13.7	7	17.8	66.1	167.9	210	95.3
475S250-3A	25	6	15	6" NPT	67.5	171.5	33.1	84.1	34.4	87.4	5.4	13.7	7	17.8	73.6	186.9	230	104.3
475S300-3	30	6	15	6" NPT	70.1	178.1	35.7	90.7	34.4	87.4	5.4	13.7	7	17.8	76.2	193.5	230	104.3
475S300-4AB	30	6	15	6" NPT	75.2	191.0	35.7	90.7	39.5	100.3	5.4	13.7	7	17.8	81.3	206.5	295	133.8
475S400-4*	40	6	15	6" NPT	80.3	204.0	40.8	103.6	39.5	100.3	5.4	13.7	7	17.8	86.4	219.5	328	148.8
475S500-5B*	40	6	15	6" NPT	85.3	216.7	40.8	103.6	44.5	113.0	5.4	13.7	7	17.8	91.4	232.2	336	152.4
475S500-5*	50	6	15	6" NPT	102.5	260.4	58	147.3	44.5	113.0	5.4	13.7	7	17.8	108.6	275.8	428	194.1
475S500-6A*	50	6	15	6" NPT	108.1	274.6	58	147.3	50.1	127.3	5.4	13.7	7	17.8	114.2	290.1	437	198.2
475S600-6*	60	6	15	6" NPT	111.8	284.0	61.7	156.7	50.1	127.3	5.4	13.7	7	17.8	117.9	299.5	403	182.8
475S600-7*	60	6	15	6" NPT	116.9	296.9	61.7	156.7	55.2	140.2	5.4	13.7	7	17.8	123	312.4	467	211.8
475S750-8	75	8	20	6" NPT	107.6	273.3	47.4	120.4	60.2	152.9	7.5	19.1	7.7	19.6	113.6	288.5	547	248.1
475S1000-9	100	8	20	6" NPT	120.1	305.1	54.9	139.4	65.2	165.6	7.5	19.1	7.7	19.6	126.2	320.5	641	290.8
475S1000-10	100	8	20	6" NPT	125.2	318.0	54.9	139.4	70.3	178.6	7.5	19.1	7.7	19.6	131.2	333.2	648	293.9
475S1000-11	100	8	20	6" NPT	130.3	331.0	54.9	139.4	75.4	191.5	7.5	19.1	7.7	19.6	136.4	346.5	654	296.6
475S1250-12	125	8	20	6" NPT	149.2	379.0	68.8	174.8	80.4	204.2	7.5	19.1	7.7	19.6	155.3	394.5	862	391.0
475S1250-13	125	8	20	6" NPT	154.3	391.9	68.8	174.8	85.5	217.2	7.5	19.1	7.7	19.6	160.4	407.4	868	393.7
Pipe Adapter															6.1	15.5		


NOTES: All models suitable for use in 8" (20 cm) wells, unless otherwise noted.
 Weights include pump end with motor in lbs.
 *Alternate motor sizes available.
 All models come with a standard 5"- 6" Pipe Adapter. Refer to chart for dimensions.

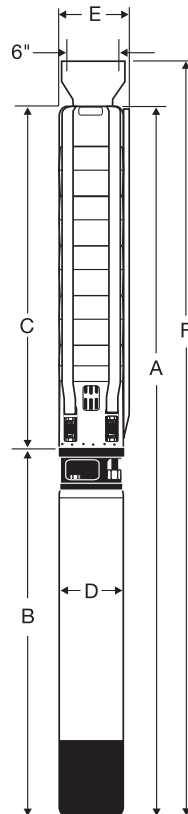

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (1-13 Stgs.)
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	316/329 Stainless Steel
Pump Shaft	431 Stainless Steel
Intermediate Bearings	Teflon®
Impeller Seal Ring	Teflon®
Check Valve Seat	NBR/316 Stainless Steel
Lower Bearing	NBR/316 Stainless Steel
Upthrust Washer	Carbon/Graphite HY22
Upthrust Stop Ring	304 S.S./Tungsten Carbide
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	316 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel
Valve Guide	304 Stainless Steel
Valve Cup Spring	304 Stainless Steel


NOTES: Specifications are subject to change without notice.

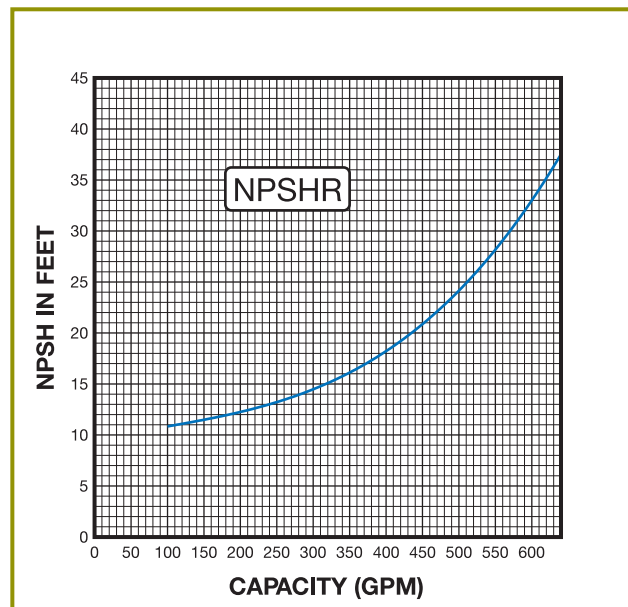

FLOW RANGE: 95 - 680 GPM

OUTLET SIZE: 6" NPT

NOMINAL DIA. 8"

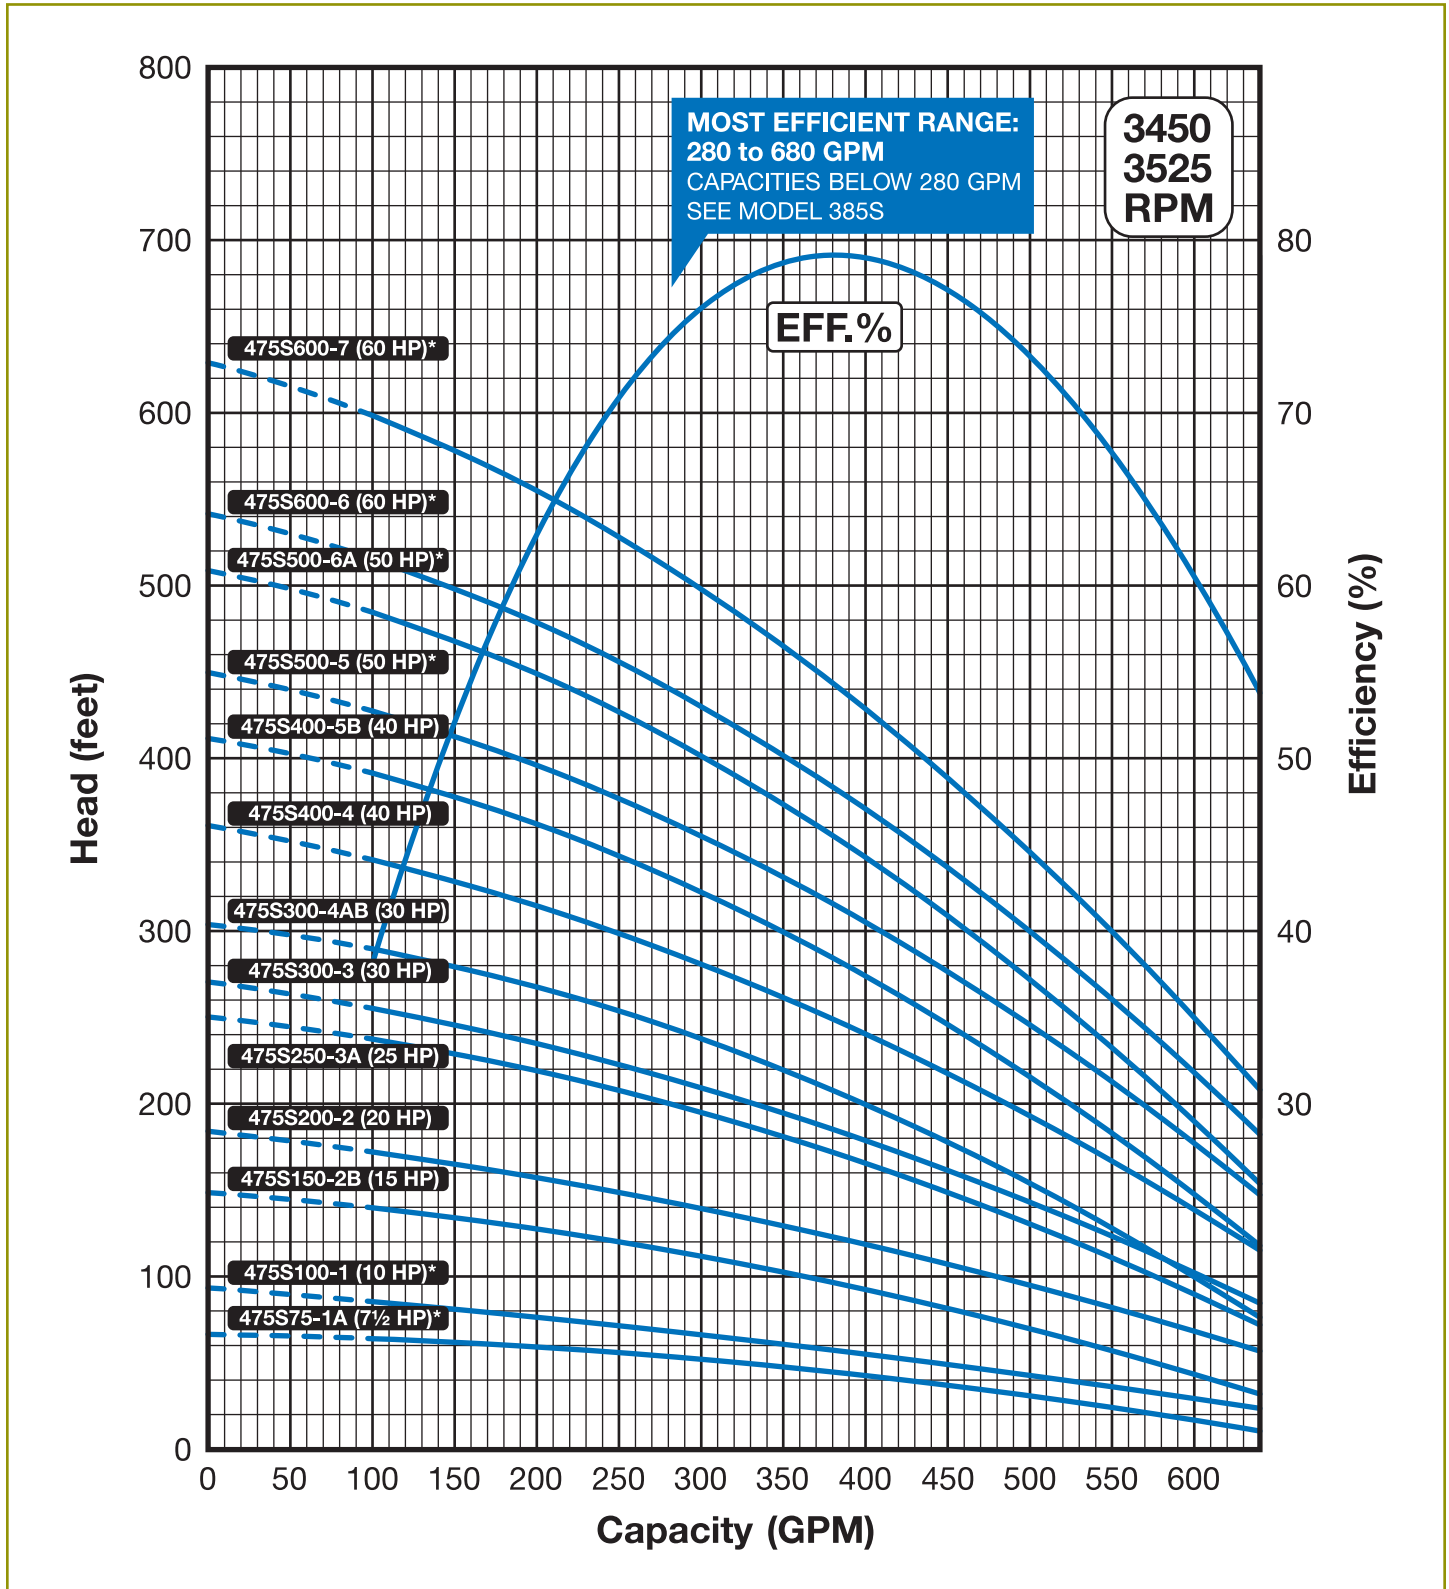

Specifications subject to change without notice.

6" motor standard, 10-60 HP/3450 RPM.

8" motor standard, 75-125 HP/3525 RPM.


* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A @ 8 ft. minimum submergence.

FLOW RANGE: 95 - 680 GPM

OUTLET SIZE: 6" NPT

NOMINAL DIA. 8"

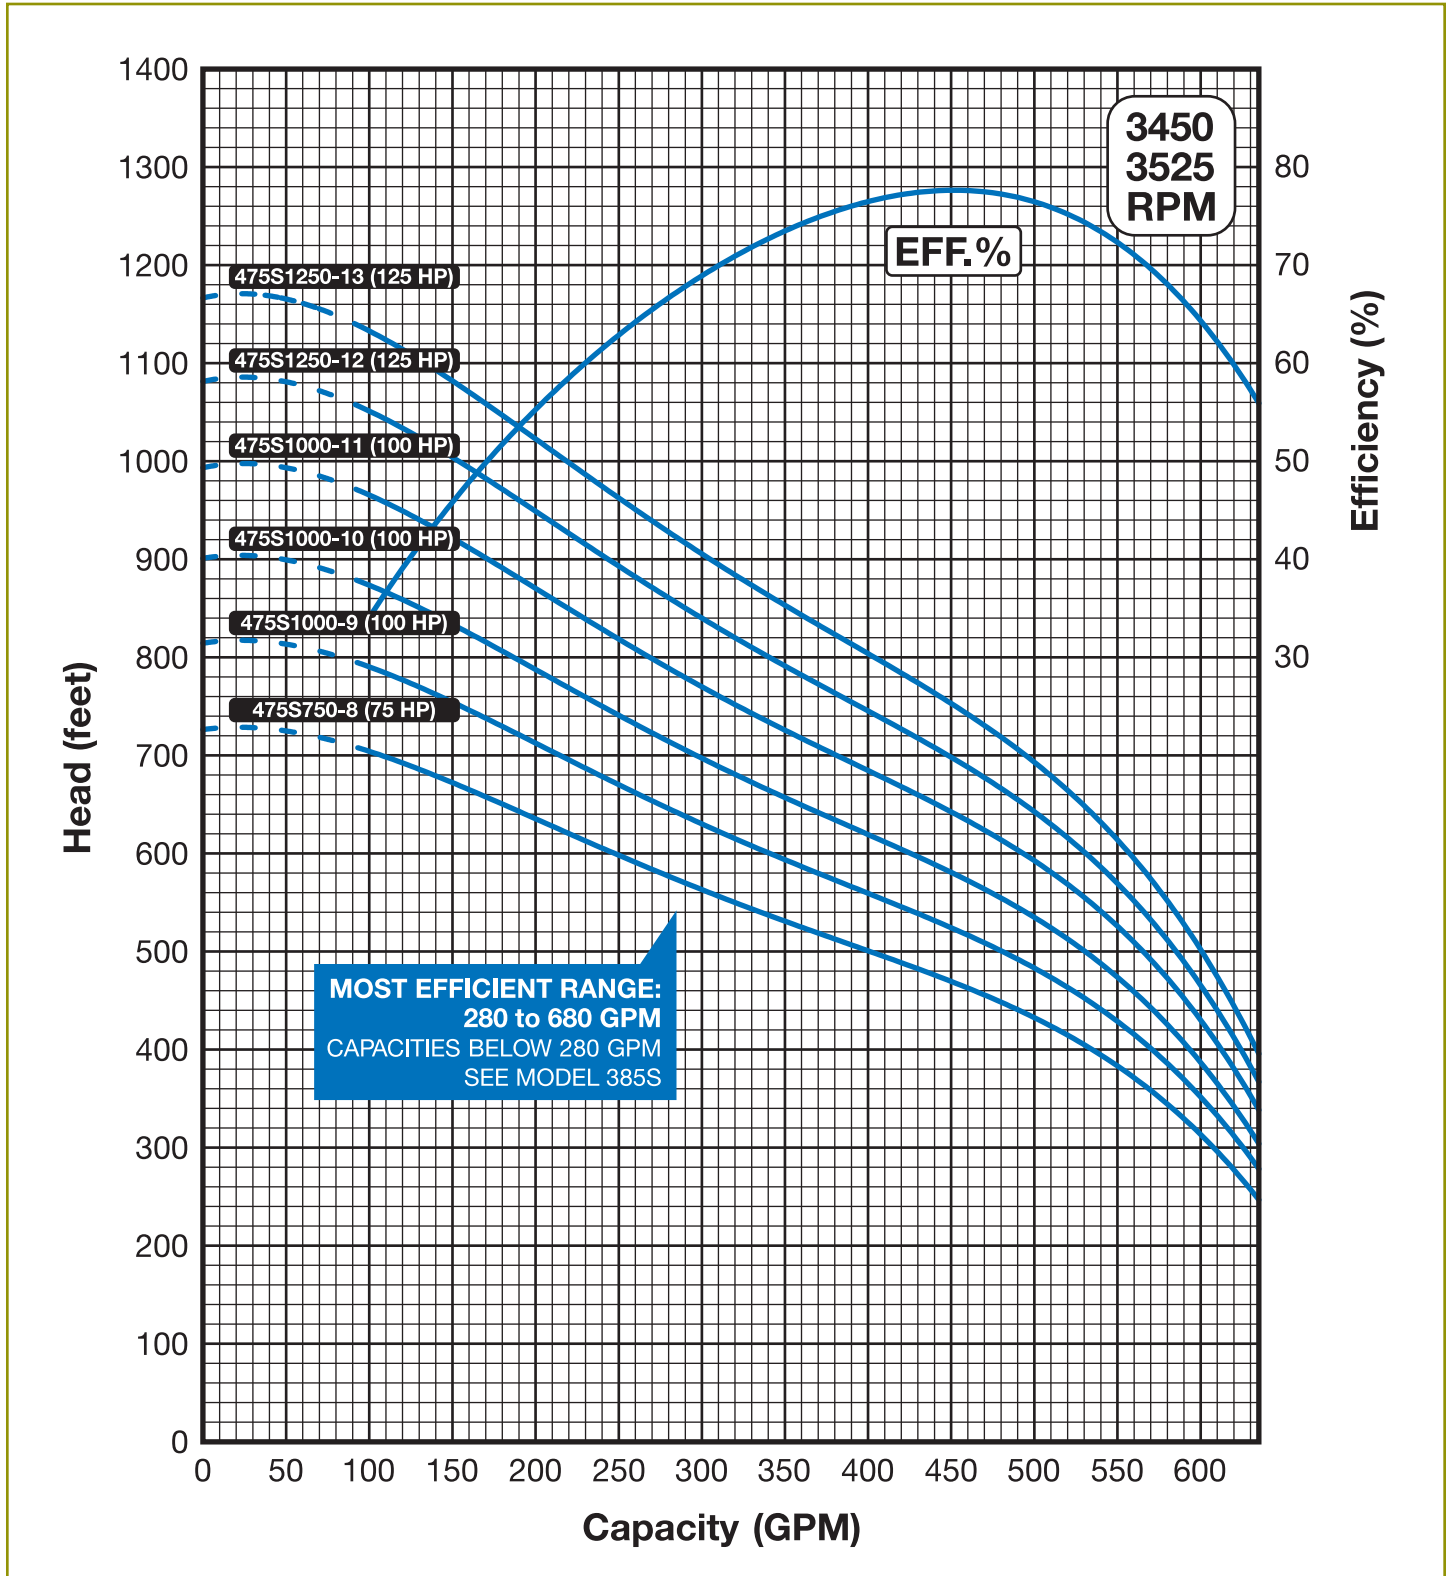

Specifications subject to change without notice.
6" motor standard, 10-60 HP/3450 RPM.
8" motor standard, 75-125 HP/3525 RPM.
* Alternate motor sizes available.
Performance conforms to ISO 9906 Annex A @ 8 ft. minimum submergence.