

Cycle Counter

Pneumatic Cycle Counter

The Pneumatic Cycle Counter is mounted inline after the filter/regulator and passes compressed air to the pump. Utilizing a piston like action, the internal magnet slide assembly moves forward (in the direction of air flow) during the on cycle and returns to a seated position in the off cycle. The digital counter senses the movement of the slide assembly and records the cycle, increasing the number by one digit. The process repeats with each cycle of the pump.

FEATURES

- Clear marking to indicate Air Flow direction
- Constructed of materials resistant to rust, corrosion, and physical damage
- Utilizes an internal magnet slide assembly
- Six digit counter, counts from 0-999,999 before resetting
- Clear viewing lens is water/impact-resistant
- Handles air pressures from 40-275 PSI
- Optional hose barb and quick connect fittings available



SPECIFICATIONS

Model GEOPC166

Material	464 Naval Brass	
Size	5" L x 2" D	
Thread Type	¼" FPT	
Pressure Range	40-120 psi	
No. of Counts Before Rollover	999,999	
Air Supply Tubing Sizes:	¼" ID	⅜" ID
Minimum Distance To Pump	15'	15'
Maximum Distance From Pump	275'	350'

Model GEOPC350

Material	464 Naval Brass	
Size	5" L x 2" D	
Thread Type	¼" FPT	
Pressure Range	40-275 psi	
No. of Counts Before Rollover	999,999	
Air Supply Tubing Sizes:	⅜" ID	½" ID
Minimum Distance To Pump	15'	15'
Maximum Distance From Pump	350'	300'

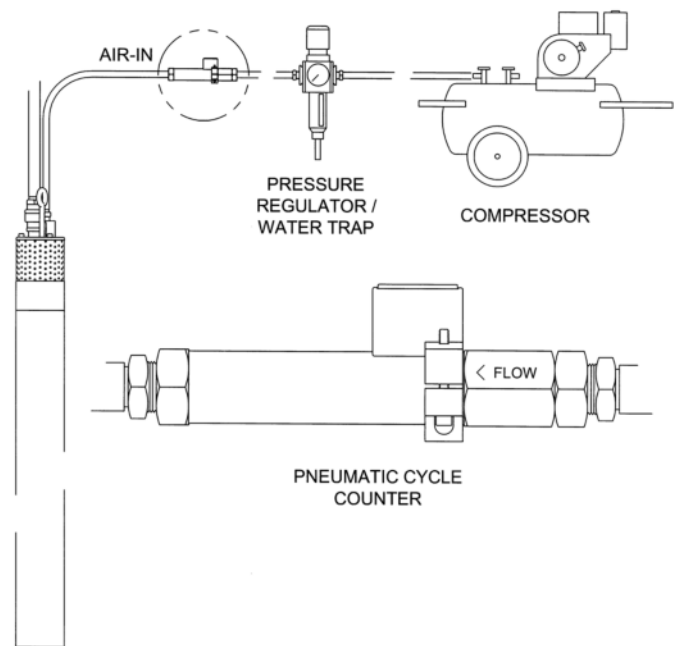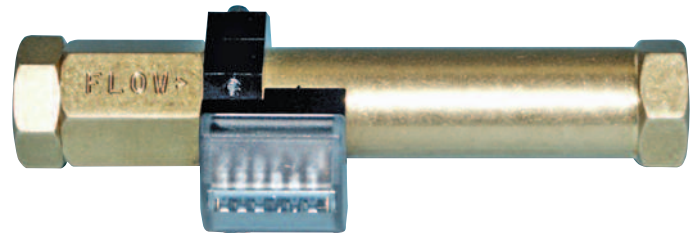

Assembly Orientation

Pneumatic Cycle Counter must be installed after Pressure Regulator/Water Trap

CALL GEOTECH TODAY (800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com