

# Hydrocarbon Recovery Systems

## Geotech 1.66 Reclaimer

The Reclaimer System is a positive air displacement pump designed for hydrocarbon recovery, leachate, condensate and total fluids applications. The pumps are designed to withstand aggressive down-well environments, and highly corrosive fluids without material breakdown or failure.

### FEATURES

- Intrinsically safe design
- Manufactured from corrosive resistant materials
- 2" (5 cm) or larger diameter wells
- Ability to pump from 500' (152 m)
- Flow rates up to 3 GPM (11.4 LPM)
- Large intake and discharge ports
- Constructed of stainless steel and PTFE
- Available in PFAS-Free Models
- Optional controllers, tubing, well caps and screened intake assemblies



Bottom Fill  
with 2" (5cm) Screen



Bottom Fill  
with Flat Screen

24" (61 cm) Dual Fill  
with Flat Screen



Bottom Fill  
with No Screen

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242

email: [sales@geotechenv.com](mailto:sales@geotechenv.com) website: [www.geotechenv.com](http://www.geotechenv.com)


# Hydrocarbon Recovery Systems



## Geotech 1.66 Reclaimer

### SPECIFICATIONS

1.66 Reclaimer	Dimensions - in. (cm)			Weight lbs. (kg)	Volume / Cycle gallons (L)	Max. Flow Rate GPM (LPM)
	A	B	C			
24" Top Fill	24 (61)	0	30.25 (76.8)	4.0 (1.8)	0.1 (.4)	2 (7.6)
24" Bottom Fill (No Screen)	24 (61)	0	27.25 (69.2)	4.0 (1.8)	0.1 (.4)	2 (7.6)
24" Bottom Fill (Flat Screen)	24 (61)	0.25 (.6)	27.5 (69.8)	4.5 (2)	0.1 (.4)	2 (7.6)
24" Bottom Fill (2" Screen)	24 (61)	2 (5)	29.25 (74.3)	5.0 (2.3)	0.1 (.4)	2 (7.6)
24" Top & Bottom Fill (No Screen)	24 (61)	0	30.25 (76.8)	4.0 (1.8)	0.1 (.4)	2 (7.6)
24" Top & Bottom Fill (Flat Screen)	24 (61)	0.25 (.6)	30.5 (77.5)	4.5 (2)	0.1 (.4)	2 (7.6)
24" Top & Bottom Fill (2" Screen)	24 (61)	2 (5)	32.25 (81.9)	5.0 (2.3)	0.1 (.4)	2 (7.6)
36" Top Fill	36 (91)	0	42.25 (107.3)	5.4 (2.4)	0.2 (.8)	2.4 (9)
36" Bottom Fill (No Screen)	36 (91)	0	39.25 (99.7)	5.4 (2.4)	0.2 (.8)	2.4 (9)
36" Bottom Fill (Flat Screen)	36 (91)	0.25 (.6)	39.5 (100.3)	5.9 (2.7)	0.2 (.8)	2.4 (9)
36" Bottom Fill (2" Screen)	36 (91)	2 (5)	41.25 (104.8)	6.4 (2.9)	0.2 (.8)	2.4 (9)
36" Top & Bottom Fill (No Screen)	36 (91)	0	42.25 (107.3)	5.4 (2.4)	0.2 (.8)	2.4 (9)
36" Top & Bottom Fill (Flat Screen)	36 (91)	0.25 (.6)	42.5 (107.9)	5.9 (2.7)	0.2 (.8)	2.4 (9)
36" Top & Bottom Fill (2" Screen)	36 (91)	2 (5)	44.25 (112.4)	6.4 (2.9)	0.2 (.8)	2.4 (9)
48" Top Fill	48 (122)	0	54.25 (137.8)	7.8 (3.5)	0.4 (1.5)	3 (11.4)
48" Bottom Fill (No Screen)	48 (122)	0	51.25 (130.2)	7.8 (3.5)	0.4 (1.5)	3 (11.4)
48" Bottom Fill (Flat Screen)	48 (122)	0.25 (.6)	51.5 (130.8)	8.3 (3.8)	0.4 (1.5)	3 (11.4)
48" Bottom Fill (2" Screen)	48 (122)	2 (5)	53.25 (135.2)	8.8 (4.0)	0.4 (1.5)	3 (11.4)
48" Top & Bottom Fill (No Screen)	48 (122)	0	54.25 (137.8)	7.8 (3.5)	0.4 (1.5)	3 (11.4)
48" Top & Bottom Fill (Flat Screen)	48 (122)	0.25 (.6)	54.5 (138.4)	8.3 (3.8)	0.4 (1.5)	3 (11.4)
48" Top & Bottom Fill (2" Screen)	48 (122)	2 (5)	56.25 (142.9)	8.8 (4.0)	0.4 (1.5)	3 (11.4)

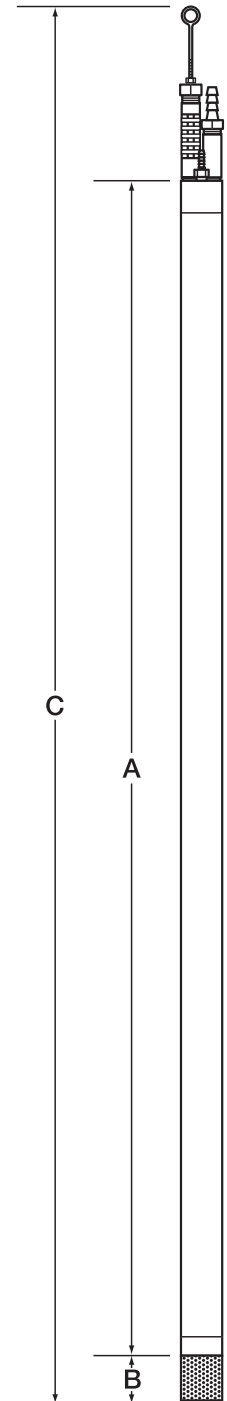

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com