

# Product Recovery Canister

Installation and Operation Manual





## Table of Contents

|                                                    |    |
|----------------------------------------------------|----|
| Section 1: System Description .....                | 3  |
| Section 2: System Installation and Operation ..... | 5  |
| Section 3: System Maintenance .....                | 6  |
| Section 4: System Troubleshooting .....            | 7  |
| Section 5: System Specifications .....             | 9  |
| Section 6: System Schematic .....                  | 11 |
| Section 7: Replacement Parts List .....            | 12 |
| Warranty and Repair .....                          | 20 |

## DOCUMENTATION CONVENTIONS

This uses the following conventions to present information:



**WARNING**

An exclamation point icon indicates a **WARNING** of a situation or condition that could lead to personal injury or death. You should not proceed until you read and thoroughly understand the **WARNING** message.



**CAUTION**

A raised hand icon indicates **CAUTION** information that relates to a situation or condition that could lead to equipment malfunction or damage. You should not proceed until you read and thoroughly understand the **CAUTION** message.



**NOTE**

A note icon indicates **NOTE** information. Notes provide additional or supplementary information about an activity or concept.

## **Section 1: System Description**

### **Function and Theory**


The Geotech Product Recovery Canister (PRC) is a passive, skimmer device designed to recover light floating hydrocarbons (such as gasoline and diesel fuel) from the ground water in wells that are 2 inches (5cm) and larger.

Featuring a floating oleophilic/hydrophobic intake assembly, the skimmer can automatically collect and skim floating product down to a sheen and features over 12 inches (30cm) of intake travel to accommodate water level fluctuations. The unit is suspended in the well at the desired recovery depth by the 25 feet (7.6m) of supplied stainless steel suspension cable.


### **System Components**

A PRC consists of two (2) major components; a product skimmer assembly and a collection canister (as shown in Figures 1-1 through 1-3). On the 4" model, the skimmer assembly is protected by a slotted screen which pre-filters the incoming product and protects the intake assembly from damage. The skimmer assembly collects free product and passes it through a coiled hose to the collection canister. Recovered product is evacuated by removing the PRC from the well and opening the drain on the bottom of the device.


Increased capacity collection canisters are available and easily installed by simply unscrewing the collection canister section and replacing it with a larger collection canister and weight assembly. When going from smaller to larger collection canisters, consideration must be made for weight. Going from larger to smaller is not a problem.

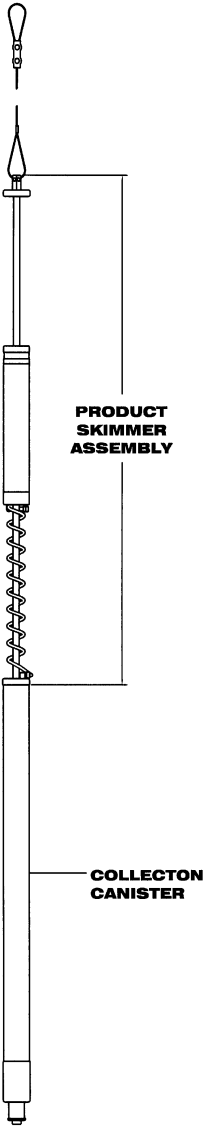

**Figure 1-1 - 2" PRC Skimmer Assembly**

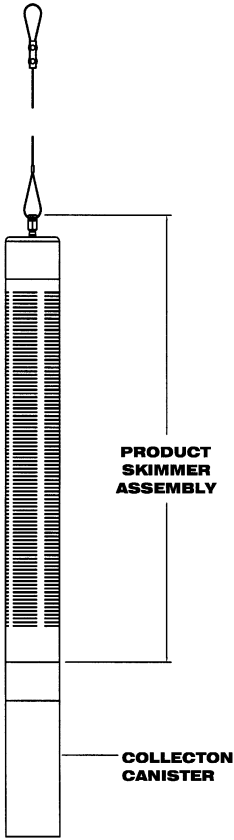

**Figure 1-2 - 4" PRC Skimmer Assembly 1**

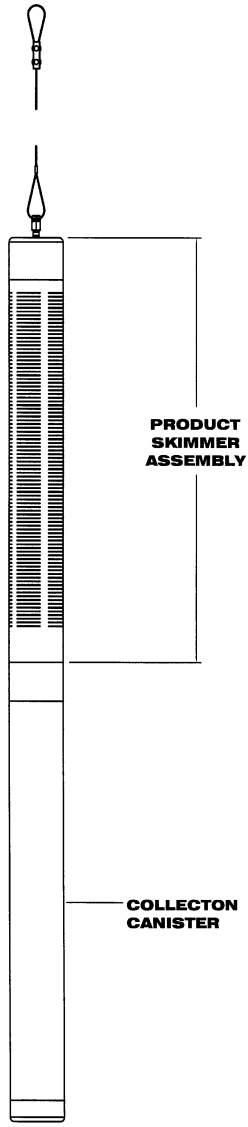

**Figure 1-3 - 4" PRC Skimmer Assembly 3**

## Section 2: System Installation and Operation



Prior to installation, the oleophilic/hydrophobic screen intake must be “conditioned”, or primed. To accomplish this, use diesel fuel or similar hydrocarbon to saturate the screen portion of the intake assembly (as shown in the figures found in Section 7). The optimum fluid would be the downwell hydrocarbons to be recovered. Take care to avoid damaging the intake assembly.

To install the PRC first measure the water and product levels with an Interface Probe (Geotech can provide you with a variety of Interface Probes for all applications).

Typically, the PRC is set so that the intake assembly is placed at the midpoint of its travel to allow for water table fluctuation in both directions (see Section 6 for an example of a PRC in the well). To set the intake assembly at the midpoint of travel, measure from the top centralizer (2” skimmer), or top cap (4” skimmer) on the PRC and along the suspension cord, the same distance as the water level reading taken with an Interface Probe, then subtract 6 inches (15cm). Suspend the PRC from the wellhead to this point.

To empty the collection canister, simply pull the PRC up from the well, open the drain valve (by applying a downward pulling force on the valve sleeve – like a water bottle) and transfer the recovered product into an approved container.

When re-installing, verify that the intake assembly will be set within its range of travel (as describe above), and that the drain valve is completely closed to avoid the possibility of water entering the canister. Figure 2-1 shows an example of the drain valve open and closed.

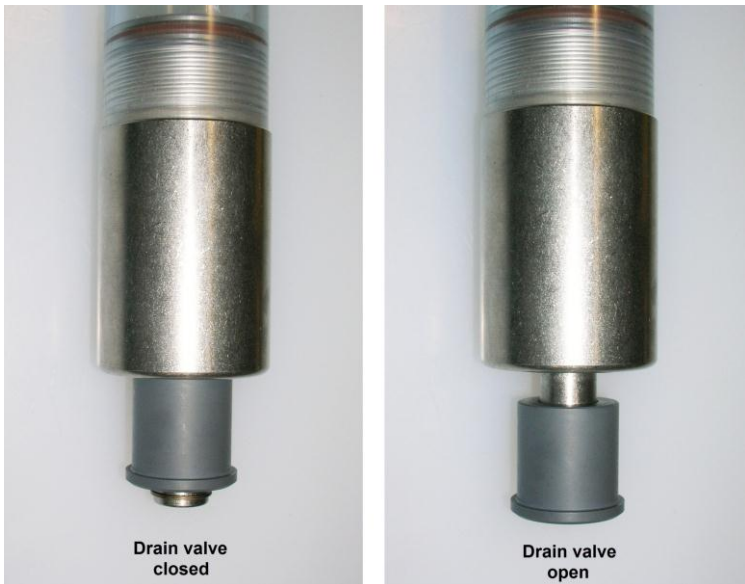


Figure 2-1 Drain valve operation

### **Section 3: System Maintenance**

With proper maintenance the Geotech PRC will provide years of reliable service. When emptying the canister, these simple maintenance steps can be taken to assure its reliability.

1. Inspect the product skimmer assembly for signs of physical damage. Scrapes or dents in the screen intake may cause the skimmer to take on water. If such damage is found, a new replacement intake assembly may be necessary.
2. Inspect the tubing coil for physical damage or obstructions, such as kinks. Replace the tubing coil as necessary.
3. Inspect the collection canister for physical damage such as cracks. Replace as necessary.
4. To clean the intake assembly screen intake, use a very soft bristle paint brush and fresh diesel fuel or the type of product being recovered. Typically, this type of maintenance should only be performed when the screen is obstructed with emulsified product or other debris. Take care not to dent or scratch the screen intake.
5. Use diesel fuel or similar hydrocarbon to saturate the screen portion of the intake. The optimum fluid would be the downwell hydrocarbons to be recovered. Take care to avoid damaging the screen intake.

## Section 4: System Troubleshooting

**Problem:** The PRC recovers only water.

**Solutions:**

1. The PRC is set too low in the well restricting the travel of the intake assembly.
2. Drain the collection canister completely, allow the screen intake to dry, re-prime the screen, then reset the PRC so that the water level fluctuation is within the travel range of the intake assembly.

**Problem:** The water level has risen past the top of the travel range of the intake assembly.

**Solution:**

Drain the collection canister completely, allow the screen intake to dry, re-prime the screen, then reset the PRC so that the water level fluctuation is within the travel range of the intake assembly.



If the water level has risen above the travel range of the intake assembly at any time between site visits, the skimmer assembly and collection canister will fill up with water and displace any collected product. It will remain this way until reset, even if the water level falls back within the travel range of the intake assembly.

**Problem:** The drain valve is not fully closed.

**Solution:**

Empty the collection canister (as described in Section 2), and then close the drain valve by pushing up on the outer sleeve of the drain valve until it stops.

**Problem:** There is a mechanical malfunction or a leak has developed.

**Solution:**

Call Geotech Environmental Equipment Inc. at 1-800-833-7958 for assistance.

**Problem:** The skimmer intake is not recovering product.

**Solutions:**

1. There is no product to recover.
2. Check, and periodically monitor, the product layer thickness.

**Problem:** The skimmer is set too high.

**Solution:**

Recheck the water and product levels and reset the skimmer assembly (use the installation procedures described in Section 2).

**Problem:** The canister vent is blocked.

**Solution:**

Make sure that the holes in the suspension fitting are clear of debris. The PRC will not operate if these holes are plugged.

**Problem:** The intake assembly is obstructed or the coiled product hose is kinked.

**Solution:**

Refer to Section 3, "System Maintenance".

## Section 5: System Specifications

| Overall Dimensions |            |                                   |
|--------------------|------------|-----------------------------------|
| Size               | Volume (L) | Dimensions                        |
| 2"                 | 0.25       | 49.0"L (149cm) x 1.75" OD (4.4cm) |
|                    | 0.5        | 59.5"L (151cm) x 1.75" OD (4.4cm) |
|                    | 1          | 82.5"L (210cm) x 1.75" OD (4.4cm) |
| 2" (With Screen)   | 0.25       | 49.0"L (149cm) x 1.88" OD (4.8cm) |
|                    | 0.5        | 59.5"L (151cm) x 1.88" OD (4.8cm) |
|                    | 1          | 82.5"L (210cm) x 1.88" OD (4.8cm) |
| 4"                 | 1          | 37"L (94cm) x 3.5" OD (9cm)       |
|                    | 3          | 53.0"L (135cm) x 3.5" OD (9cm)    |
|                    | 4          | 60.0"L (152cm) x 3.5" OD (9cm)    |

| Weight           |            |                 |                  |
|------------------|------------|-----------------|------------------|
| Size             | Volume (L) | Empty Weight    | Full Weight      |
| 2"               | 0.25       | 3.1lbs (1.4kg)  | 3.5lbs (1.6kg)   |
|                  | 0.5        | 3.5lbs (1.6kg)  | 4.3lbs (2.0kg)   |
|                  | 1          | 5.2lbs (2.4kg)  | 6.7lbs (3.0kg)   |
| 2" (With Screen) | 0.25       | 4.5lbs (2.0kg)  | 4.9 lbs (2.2kg)  |
|                  | 0.5        | 4.9lbs (2.2kg)  | 5.7lbs (2.6kg)   |
|                  | 1          | 6.6lbs (3.0kg)  | 8.1lbs (3.7kg)   |
| 4"               | 1          | 8.0lbs (3.7kg)  | 9.5 lbs (4.3kg)  |
|                  | 3          | 15.0lbs (6.8kg) | 19.0lbs (8.6kg)  |
|                  | 4          | 18.0lbs (8.2kg) | 25.5lbs (11.6kg) |

| Overall Dimensions |            |                    |
|--------------------|------------|--------------------|
| Size               | Volume (L) | Capacity (gallons) |
| 2"                 | 0.25       | 0.07               |
|                    | 0.5        | 0.13               |
|                    | 1          | 0.26               |
| 4"                 | 1          | 0.26               |
|                    | 3          | 0.8                |
|                    | 4          | 1.06               |

| Minimum Water Required |            |               |
|------------------------|------------|---------------|
| Size                   | Volume (L) | Depth         |
| 2"                     | 0.25       | 29.0" (74cm)  |
|                        | 0.5        | 39.5" (100cm) |
|                        | 1          | 62.0" (157cm) |
| 4"                     | 1          | 18.5" (47cm)  |
|                        | 3          | 35.0" (89cm)  |
|                        | 4          | 43.0" (109cm) |

Section 6: System Schematic

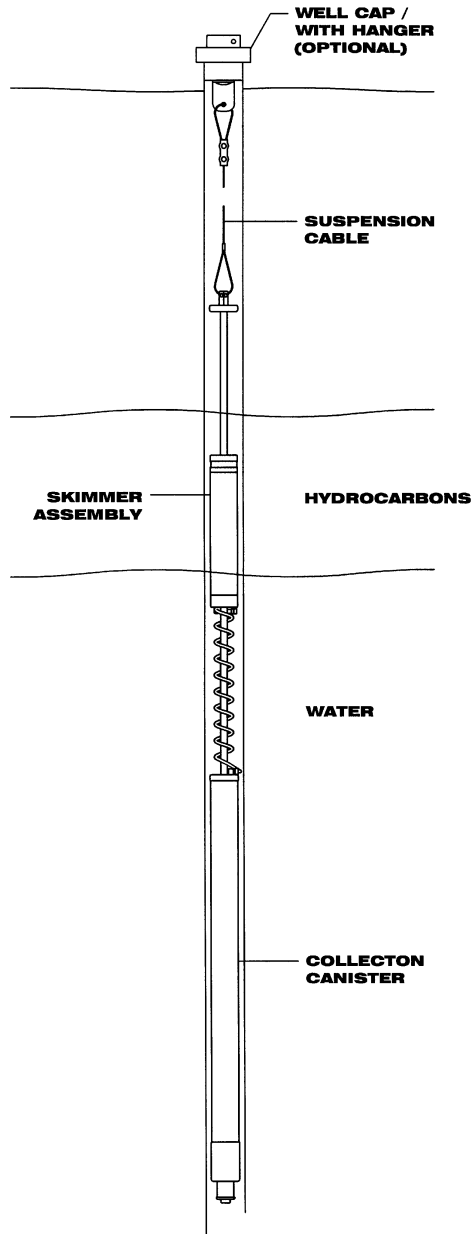


Figure 6-1 – PRC Skimmer deployed in well

## Section 7: Replacement Parts List

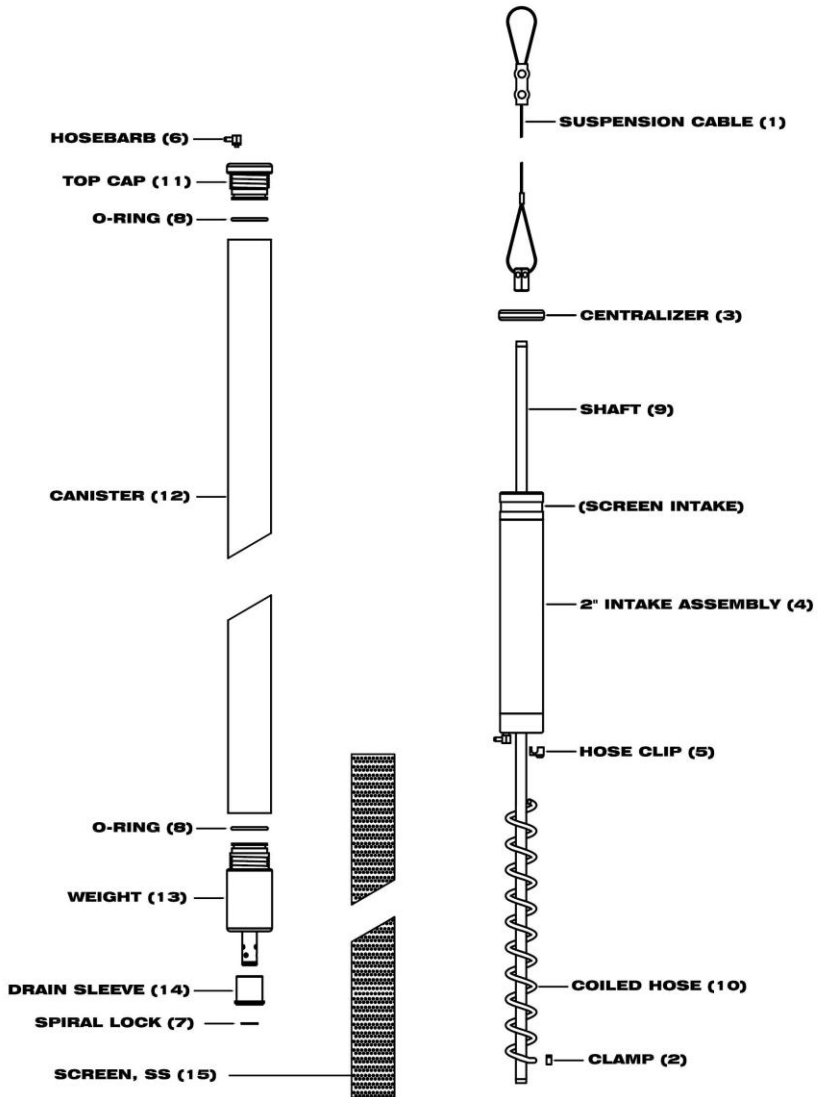


Figure 7-1 – Standard 2" PRC Skimmer Assembly

Part numbers for the Standard 2" PRC Skimmer Assembly

| Item # | Parts Description                     | Parts List |
|--------|---------------------------------------|------------|
| 1      | ASSY,CABLE,SUSPENSION,PRC,25FT        | 56650305   |
| 2      | CLAMP,SS,STEPLESS EAR,7MM             | 16600005   |
| 3      | CENTRALIZER,PVC,SKIMMER,2"            | 26650306   |
|        | CENTRALIZER,PVC,SCREENED PR2          | 26600186   |
| 4      | ASSY,BUOY,SKIMMER,2"100MESH           | 56650309   |
|        | ASSY,BUOY,SKIMMER,2" 60 MESH          | 56650312   |
| 5      | HOSE CLIP,SKIMMER FLOAT               | 26650028   |
| 6      | HOSEBARB,BRS,1/8"X10-32,90DEG         | 17500149   |
| 7      | LOCK,SS,9/16",SPIRAL                  | 16650304   |
| 8      | O-RING,VITON,#123 (BROWN)             | 11200299   |
| 9      | SHAFT,SS,SKIMMER,33.5",PRC            | 26600002   |
| 10     | HOSE,COILED,PR2                       | 26650304   |
| 11     | CAP,PVC,TOP,PRC2                      | 26650315   |
| 12     | BODY,PVC,CANISTER,0.125L,PRC          | 26650321   |
|        | BODY,PVC,CANISTER,0.25L,PRC           | 26650307   |
|        | BODY,PVC,CANISTER,0.5L,PRC            | 26650311   |
|        | BODY,PVC,CANISTER,1LITER,PRC          | 26650313   |
| 13     | ASSY,WEIGHT,SKIMMER,2",.125L PRC,     | 56650303   |
|        | ASSY,WEIGHT,SKIMMER,2",.25/.5L PRC,   | 56650302   |
|        | ASSY,WEIGHT,SKIMMER,2",1L PRC         | 56650301   |
| 14     | ASSY,SLEEVE,DRAIN,W/ O-RINGS          | 56650308   |
| 15     | SCREEN,SS,1.88"ODX32.7" STRAIGHT WELD | 26600188   |

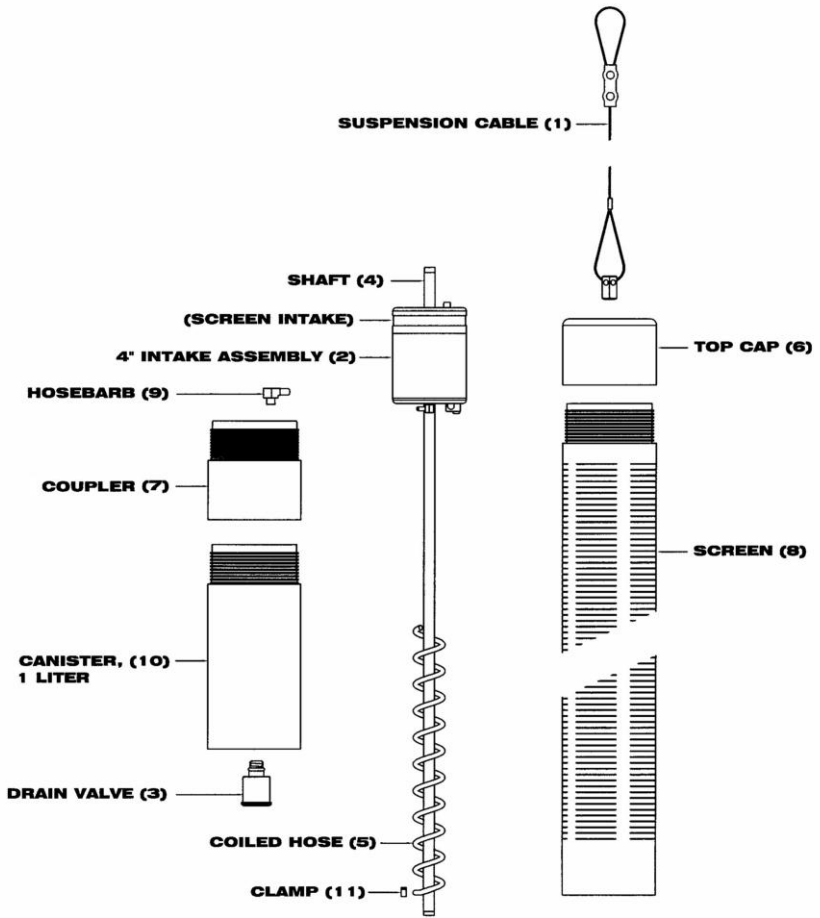


Figure 7-2 – Standard 4" PRC Skimmer Assembly (1 Liter)

Part numbers for the Standard 4" PRC Skimmer Assembly (1 Liter)

| <b>Item #</b> | <b>Parts Description</b>          | <b>Parts List</b> |
|---------------|-----------------------------------|-------------------|
| 1             | ASSY,CABLE,SUSPENSION,PRC,25FT    | 56650305          |
| 2             | ASSY,BUOY,SKIMMER,4"100 MESH      | 56650310          |
| 3             | ASSY,DRAIN VALVE,SKIMMER,4" PR4,  | 56650307          |
| 4             | SHAFT,SS,SKIMMER,24.5" 2065 REV A | 26650305          |
| 5             | HOSE,COILED,PR4                   | 16650312          |
| 6             | CAP,PVC,TOP,PRC4                  | 16650313          |
| 7             | COUPLER,PVC,PRC4                  | 16650316          |
| 8             | SCREEN,PVC,PRC4                   | 16650317          |
| 9             | HOSEBARB,BRS,.170"X1/8MPT,90D     | 17500148          |
| 10            | CANISTER,1L,PRC4,W/ BTM PLATE     | 56650311          |
| 11            | CLAMP,SS,STEPLESS EAR,7MM         | 16600005          |

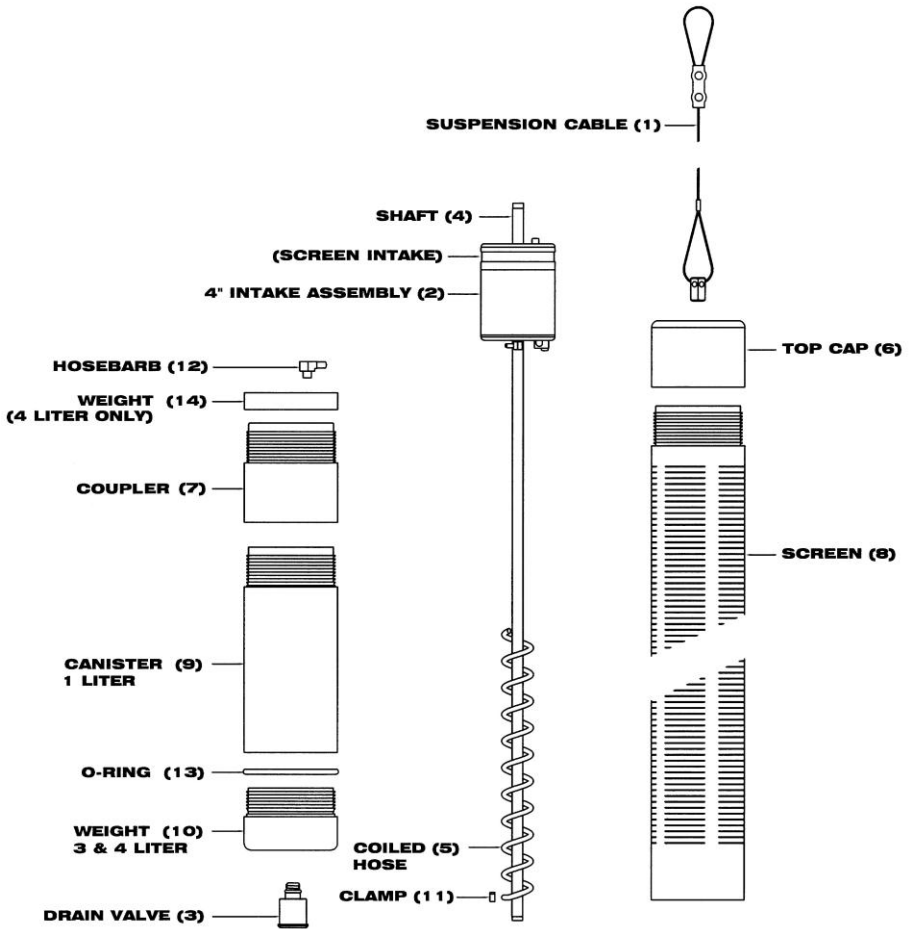


Figure 7-3 – Standard 4" PRC Skimmer Assembly (3 & 4 Liter)

Part numbers for the Standard 4" PRC Skimmer Assembly (3 & 4 Liter)

| <b>Item #</b> | <b>Parts Description</b>          | <b>Parts List</b> |
|---------------|-----------------------------------|-------------------|
| 1             | ASSY,CABLE,SUSPENSION,PRC,25FT    | 56650305          |
| 2             | ASSY,BUOY,SKIMMER,4"100 MESH      | 56650310          |
| 3             | ASSY,DRAIN VALVE,SKIMMER,4" PR4,  | 56650307          |
| 4             | SHAFT,SS,SKIMMER,24.5" 2065 REV A | 26650305          |
| 5             | HOSE,COILED,PR4                   | 16650312          |
| 6             | CAP,PVC,TOP,PRC4                  | 16650313          |
| 7             | COUPLER,PVC,PRC4                  | 16650316          |
| 8             | SCREEN,PVC,PRC4                   | 16650317          |
| 9             | CANISTER,PVC,3L,PRC4              | 16650318          |
|               | CANISTER,PVC,4L,PRC4              | 16650320          |
| 10            | WEIGHT,SS4,3L&4L,PRC4             | 16650319          |
| 11            | CLAMP,SS,STEPLESS EAR,7MM         | 16600005          |
| 12            | HOSEBARB,BRS,.170"X1/8MPT,90D     | 17500148          |
| 13            | O-RING,VITON,#041                 | 16650321          |
| 14            | WEIGHT,SS4,4L,PRC4                | 26650318          |

# NOTES

# NOTES

## The Warranty

For a period of one (1) year from date of first sale, product is warranted to be free from defects in materials and workmanship. Geotech agrees to repair or replace, at Geotech's option, the portion proving defective, or at our option to refund the purchase price thereof. Geotech will have no warranty obligation if the product is subjected to abnormal operating conditions, accident, abuse, misuse, unauthorized modification, alteration, repair, or replacement of wear parts. User assumes all other risk, if any, including the risk of injury, loss, or damage, direct or consequential, arising out of the use, misuse, or inability to use this product. User agrees to use, maintain and install product in accordance with recommendations and instructions. User is responsible for transportation charges connected to the repair or replacement of product under this warranty.

## Equipment Return Policy

A Return Material Authorization number (RMA #) is required prior to return of any equipment to our facilities, please call our 800 number for appropriate location. An RMA # will be issued upon receipt of your request to return equipment, which should include reasons for the return. Your return shipment to us must have this RMA # clearly marked on the outside of the package. Proof of date of purchase is required for processing of all warranty requests.

This policy applies to both equipment sales and repair orders.

FOR A RETURN MATERIAL AUTHORIZATION, PLEASE CALL OUR  
SERVICE DEPARTMENT AT 1-800-833-7958.

Model Number: \_\_\_\_\_

Serial Number: \_\_\_\_\_

Date of Purchase: \_\_\_\_\_

## Equipment Decontamination

Prior to return, all equipment must be thoroughly cleaned and decontaminated. Please make note on RMA form, the use of equipment, contaminants equipment was exposed to, and decontamination solutions/methods used. Geotech reserves the right to refuse any equipment not properly decontaminated. Geotech may also choose to decontaminate the equipment for a fee, which will be applied to the repair order invoice.



**Geotech Environmental Equipment, Inc.**  
2650 East 40th Avenue Denver, Colorado 80205  
(303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242  
email: [sales@geotechenv.com](mailto:sales@geotechenv.com) website: [www.geotechenv.com](http://www.geotechenv.com)